




ecoLED

R7s Flood Light Retrofit Cylinders

230v R7S Retrofit Flood Light 5w, 10w & 15w Warm White

| | |
|---------------------------|----------------------------|
| Product Codes | R7S-COB78 |
| | R7S-COB118 |
| | R7S-COB189 |
| Power (watts) | R7S-COB78 = 5w |
| | R7S-COB118 = 10w |
| | R7S-COB189 = 15w |
| Operating voltage | 80-270v |
| Lamp cap | R7S |
| Expected Life (hours) | 50000 |
| Light output (lumens) | R7S-COB78 = 450 lm |
| | R7S-COB118 = 850 lm |
| | R7S-COB189 = 1250 lm |
| Colour temperature | 2900/6000k Cool/Warm White |
| Colour rendering index | 80 |
| Beam angle (degrees) | 160° |
| Dimming range | opt |
| Dimensions (l x b x h) wt | 78 x 55 x 55mm (75g) |
| | 118 x 55 x 55mm (130g) |
| | 189 x 55 x 55mm (180g) |

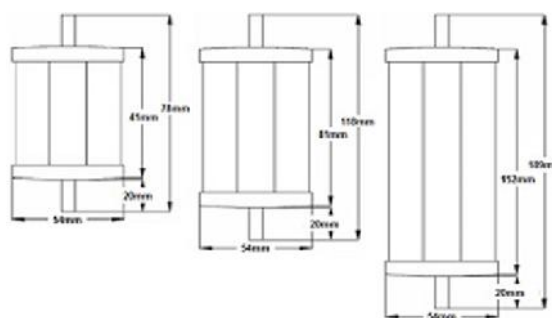

This high quality LED Halogen Flood Replacement light (80-270v halogen or CFL) that uses up to 9 times less electricity than it's retrofit alternative, comes with a 1 year warranty.

The R7S-COB78 option of this globe closely replicates a 40w halogen flood whereas the R7S-COB118 closely replicates a 75w Halogen Flood, and the R7S-COB189 best replicates a 100w Halogen Flood.

This bulb uses 3 aesthetically appealing COB LED chips placed at an obtuse angle to each other to give a very even light spread throughout it's 160° beam angle.

The life expectancy of this globe is 50000 hours and is CE & RoHS compliant.

Other colours of this globe are available subject to quotation.